


**sisco**




**Gloss Meter 60 Degree, 200G/1200/2000GU**

**SISCO-GM-DG60**

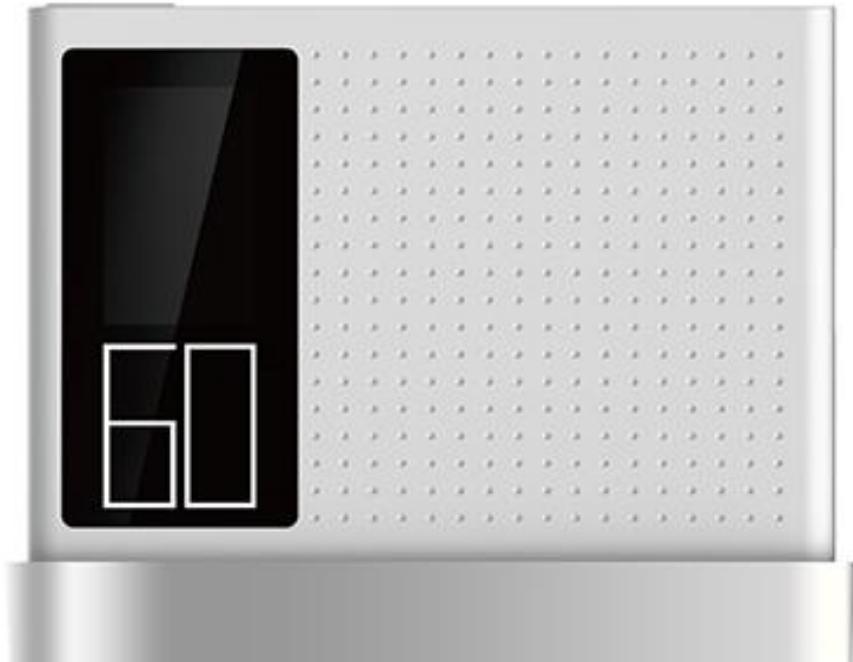


## Product introduction

Please read this manual carefully before using the product.

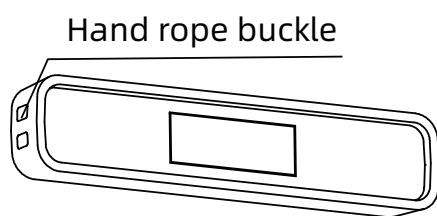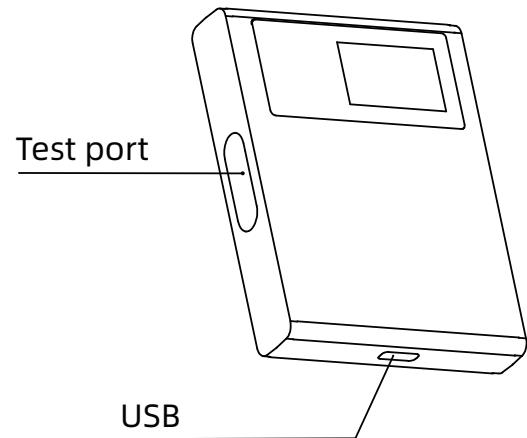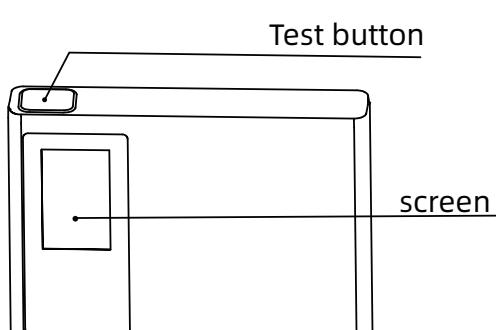


## Quick guide

### 1. Start up and measure




Press the key to start

### 2. How to test

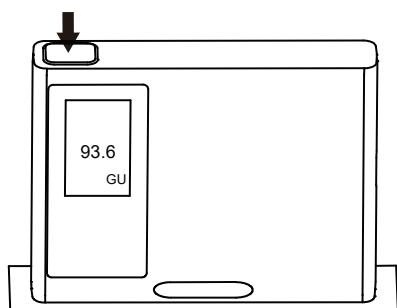


Measurement standard

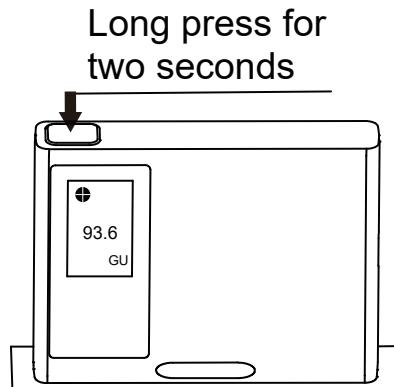

Enter the automatic  
measurement interface

### 3. Close

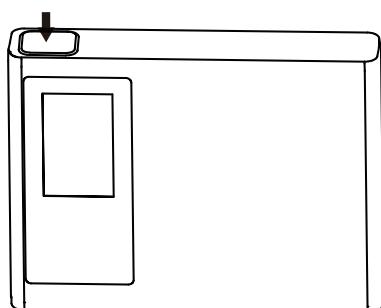

The instrument will automatically shut down if it remains unused for more than one minute;  
Alternatively, press and hold the test button for 5 seconds to shut it down.

## Specs

Model	SISCO-GM-DG60 SE	SISCO-GM-DG60 Pro	SISCO-GM-DG60 MAX		
<b>Calibration</b>	Automatic				
<b>Angle Measurement</b>	60°				
<b>Test Parameters</b>	Gloss (GU)				
<b>Test Aperture</b>	23*7mm				
<b>Measurement Range</b>	0-200GU	0-1200GU	0-2000GU		
<b>Graduation Value</b>	1GU	0-100: 0.1GU; > 100: 1GU			
<b>Measurement Stability</b>	1	±0.1 / ±0.1 %	0.1 / 0.1%		
<b>Measurement Time</b>	< 1s				
<b>Battery Capacity</b>	5000 continuous measurements on a single charge	15000 continuous measurements on a single charge	30000 continuous measurements on a single charge		
<b>Screen</b>	Full-color display screen, 135*240mm				
<b>Interface</b>	USB	USB, bluetooth			
<b>Operating Temperature</b>	0-40°C				
<b>Humidity</b>	Less than 85%, no condensation				
<b>Weight</b>	80g	116g			
<b>Size</b>	84*70*17mm				
<b>Accessories</b>	USB data cable, lanyard, instruction manual, calibration standard board, cleaning cloth.				

## Warranty information

### Reminder

It is recommended to keep the original packaging for at least 30 days, as it is essential for safe transport.

### Non-Warranty terms

1. Unauthorized repairs, misuse, accidents, modifications, or use of non-official accessories.
2. The instrument is out of warranty.
3. Damage caused by external force.
4. Performance failures not listed in the product performance failure list.
5. Performance failures caused by human error.

### Warnings

- Do not attempt to disassemble or replace any parts of the device. Please contact your authorized dealer or official customer service for after-sales service.
- Do not place the device near heat sources or expose it directly to fire.
- If liquid enters the device, immediately turn off the power.
- This product contains small parts. Ingestion by children may cause choking and other hazards.

### Product performance failure table

Name	Performance failure
Gloss Meter	1.The instrument switch is stuck and cannot be switched normally 2.The instrument display fails to display normally 3.The measuring light source is not on