




Portable Axle Weighing Scale

PRODUCT INTRODUCTION

Portable axle weighing scale is one of the ultrasonic instruments, and it is also a must-have for protecting the car. This equipment mainly consists of weight indicator and weighing platform pads. The GPWA08 portable axle weighing scale is suitable for static weighing. The indicator can be equipped with 4 to 16 weighing platform pads. It is mainly used in automobile/aircraft production inspection, low-value vehicle cargo measurement, portable mobile truck scales, static weighing platforms, etc.




SIZE AND WEIGHT

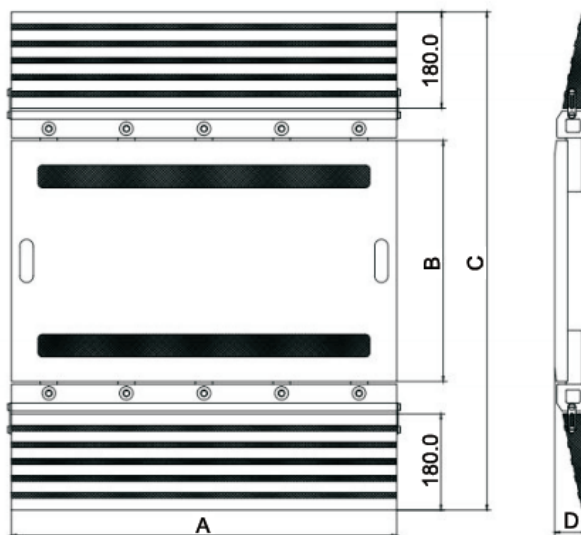


Series	Pad size(mm)			Pad weight (kg)	Rubber slope size(mm)			2 pcs Slope weight (kg)	(255)F indicator weight (kg)
	A(length)	B(width)	D(height)		length	width	height		
500	500	400	58	21	500	180	45	7.6	9
720	720	450	58	33	720	180	45	10.8	

- The single board is light in weight and easy to carry and move;
- High static weighing accuracy;
- The weighing platform pad is made of high-strength aviation aluminum alloy, with surface oxidation treatment, wear resistance and corrosion resistance;
- The weighing platform pad is embedded with high-precision shear beam load cells, making the weighing accurate and stable;
- Wireless data transmission between the indicator and the platform solves the cumbersome wired wiring and the risk of easily broken wires;
- The rubber guide slope has a non-slip surface pattern, which is strong and durable. The connecting beam with the tabletop is connected with a lock to prevent the tabletop from becoming separated from the guide slope;
- The indicator uses a 10.1-inch color touch screen, which can be operated by touch or wireless mouse, Android system, and is highly scalable;
- 8. The platform pads and indicator are powered by built-in rechargeable lithium batteries, and the instrument displays the remaining power of the platform and instrument in real time;
- The indicator has a built-in printer that can print the license plate number, weight limit, load mass, total mass, wheel weight and total weight.

PLATFORM PADS TECHNICAL PARAMETERS

Picture	Platform size(mm)	500×400×58	720×450×58
	Slope size(mm)	500×180×45	720×180×45
	Maximum range of a pad (t)	1~10	2~20
	Precision	static: 0.1~0.3%	
	Load cell	There are four or ten shear beam load cell on the bottom	
	Battery	rechargeable lithium battery, 3.7V/4000mAh	
	Safe overload range	120%	

WIRELESS INDICATOR TECHNICAL PARAMETERS

Indicator picture	Model	Technical parameters
	F/255	<ol style="list-style-type: none"> 1. Dynamic and dynamic static measurement, 1 drag 2 can be realized; 2. Static measurement, 1 drag 4 to 1 drag 16 platforms; 3. 10.1 inch touch color screen; 4. Index value: 5,10,20kg optional; 5. Instrument and platform wireless transmission distance: 15 meters; 6. Working temperature: -20 ~ 80℃; 7. Battery: Rechargeable lithium battery, 12V/10000mAh; 8. Data output: RS232 and USB; 9. Printer: built-in pin type high-speed energy-saving printer; 10. The meter can store 50,000 vehicle weighing information.